

407 RT City rig



407 RT Technical Data

ENGINE

Diesel Engine	Deutz TCD 3.4 L4
Power	90 kW
Tractive power	13 000 kg
Shoe width	450 mm
Weight std. type from	7 000 kg

FEEDER

Feed length	4 000 kg
Feeder force	3 500 kg
Pull up	7 000 kg
Mast winch	450 kg
Drill table	Ø230 mm alt. 280 mm
Feed Extention	1 000 mm
Rapid feed	0,60 m/sec
Rapid pull up	0,60 m/sec
Pipe wrench cylinder	Ø 80 mm

ROTATION UNIT



Torque	2 300 / 4 600 Nm
Rotation speed	0-144 / 0-72 rpm
Spindel thread API 2	AP 2 7/8"IF-API2 3/8"REG

OTHER

Pipe rack capacity	63 pcs. 76*3000
Track speed	2,5 / 4,0 km/h
Battery	2 x 50 Ah dry
Hydr. tank	130 L
Diesel Tank	100 L

OPTIONAL EQUIPMENT

Main winch, 4000 kg.
Welding machine
Water pump
Diverter housing

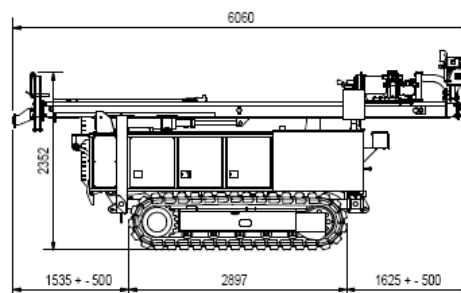

From the very first Qmatec /Nemek produced rig in 1966, our rigs have been developed and improved in close collaboration with visionary customers. Our employees have long experience and are proud of their profession. Our service people are available where you are, 24-hours a day. This ensures quality throughout the entire process and helps you to be profitable every day – year after year.



407 RT
www.qmatec.no
Additional technical data
More pictures

Qmatec Drilling AS

Verkstadvegen 12, 3890 VINJE

Phone: +47 35063400

E-mail: mail@qmatec.com

Web page: www.qmatec.com