

# 407 RTP Pipe handling rig





## 407 RTP Technical Data

### ENGINE

Diesel Engine	Deutz TCD 3.4 L4
Power	90 kW
Tractive power	13 000 kg
Shoe width	450 mm
Weight std. type from	7 500 - 8 200 kg

### FEEDER

Feed length	4 000 kg
Feeder force	3 500 kg
Pull up	7 000 kg
Mast winch	450 kg
Drill table	Ø230 alt 280 mm
Feed Extention	1 000 mm
Rapid feed	0,60 m/sec
Rapid pull up	0,60 m/sec
Pipe wrench cylinder	Ø 80 mm

### ROTATION UNIT



Torque	2 300 / 4 600 Nm
Rotation speed	0-144 / 0-72 rpm
Spindel thread	AP 2 7/8"IF-API2 /8"REG

### OTHER

Pipe rack capacity	63 pcs. 76*3000 mm
Track speed	2,4 / 4,0 km/h
Battery	2 x 50 Ah dry
Hydr. tank	130 L
Diesel tank	100 L

### OPTIONAL EQUIPMENT

Main winch, 4000 kg.  
Welding machine  
Water pump  
Diverter housing

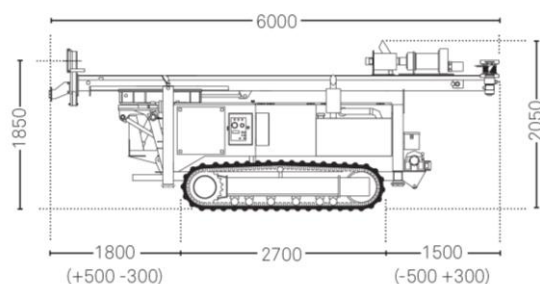

From the very first Qmatec /Nemek produced rig in 1966, our rigs have been developed and improved in close collaboration with visionary customers. Our employees have long experience and are proud of their profession. Our service people are available where you are, 24-hours a day. This ensures quality throughout the entire process and helps you to be profitable every day – year after year.



**407 RTP**  
www.qmatec.no  
Additional technical data  
More pictures

### Qmatec Drilling AS

Verkstadvegen 12, 3890 VINJE

Tlf: +47 35063400

E-mail: mail@qmatec.com

Web.page: www.qmatec.no